
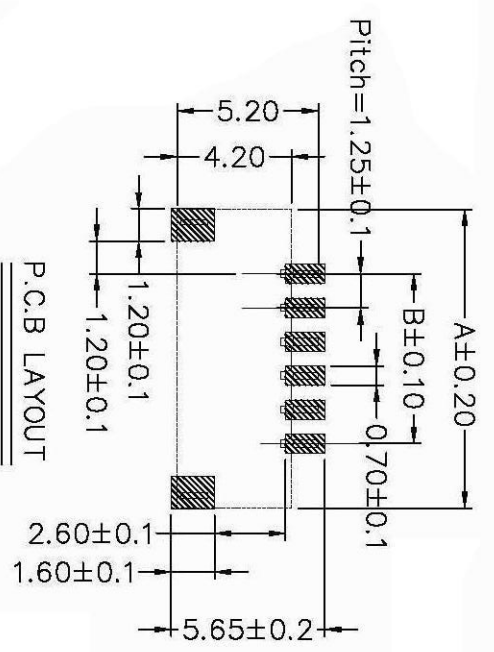
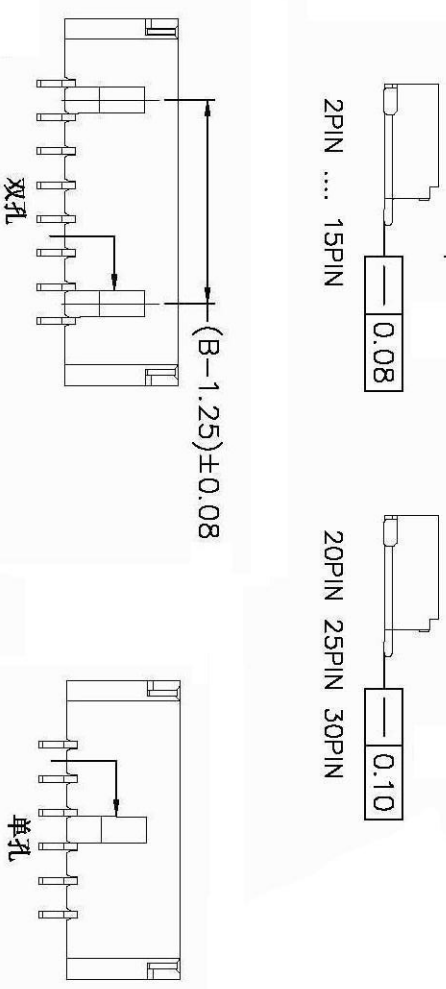


REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A0					HANG

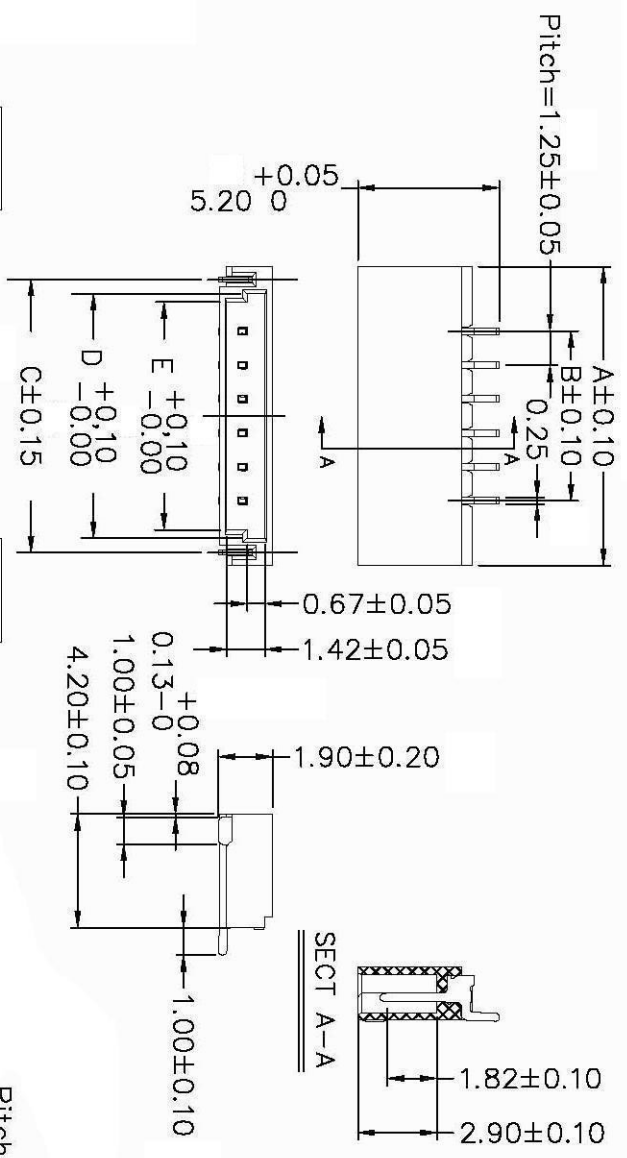

NOTE:

1. MATERIALS:
 HOUSING : PA46
 CONTACT : BRASS
 SOLDER PAD: BRASS

2. FINISH:
 CONTACT : TIN OVER NICKEL.
 PEG : TIN OVER NICKEL.

PERFORMANCE CHARACTERISTICS:
 CURRENT RATING : 1.0 AMP
 VOLTAGE RATING : 250VAC MIN.
 CONTACT RESISTANCE : 20mΩ MAX.
 INSULATION RESISTANCE : 100MΩ MIN. AT 250VAC.
 OPERATING TEMPERATURE : -40°C TO 85°C.

DIM E	3.3	4.55	5.8	7.05	8.3	10.8	12.05	13.3	14.55	15.8	17.05	18.3	19.55	25.8	32.05	38.3
DIM D	3.9	5.15	6.4	7.65	8.9	11.4	12.65	13.9	15.15	16.4	17.65	18.9	20.15	26.4	32.65	38.9
DIM C	5.05	6.3	7.55	8.8	10.05	12.55	13.8	15.05	16.3	17.55	18.8	20.05	21.3	27.55	33.8	40.05
DIM B	1.25	2.5	3.75	5.0	6.25	8.75	10.0	11.25	12.5	13.75	15.0	16.25	17.5	23.75	30.0	36.25
DIM A	6.00	7.25	8.50	9.75	11.0	13.5	14.75	16.0	17.25	18.5	19.75	21.0	22.25	28.5	34.75	41.0
POS	2	3	4	5	6	8	9	10	11	12	13	14	15	20	25	30

LASTAR

Lastar Technology CO., LTD

DRAW NO.	WF-125-01B	DATE	
DESIGN	HANG	070505	
CHECK	WANGCM	070506	
APPROVED	HUYX	070506	

DRAW NAME:	WAFER 1.25mm 3PIN SMT H2.0mm
P/N NO.	WF-125-01B-0344
UNIT:	mm
SHEET:	N/A
MODEL:	
REV. AO	SCALE N/A