
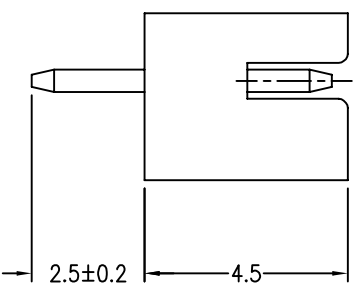
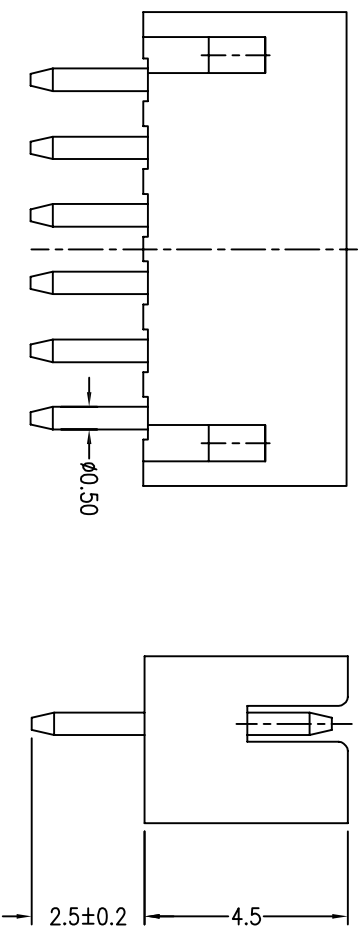



REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
AO			RELEASE TO CUSTOMER		HANG

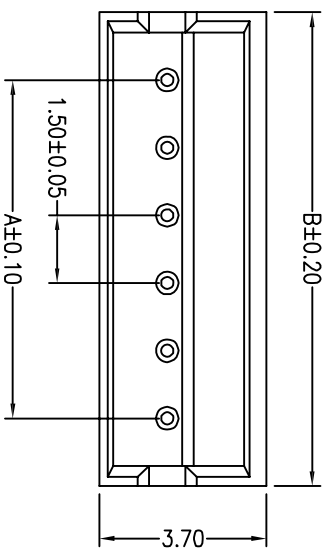

- SPECIFICATIONS**
1. Voltage rating: AC, DC, 250V (rms)
 2. Current rating: 1.0A, AC, DC
 3. Withstand voltage: 500V AC/minute
 4. Insulation resistance: 1000 ohm Min
 5. Contact resistance: 0.02 ohm Max
 6. Working Temperature: -25°C~+85°C
 7. Applicable PCB thickness: 0.8mm~1.6mm
 8. Applicable Cable: AWG#28~#22


MATERIALS

1. Wafer: Nylon, UL94V-0, Beige Color
2. PIN: Brass



Assembly Layout

PIN	A	B
2P	1.50	4.50
3P	3.00	6.00
4P	4.50	7.50
5P	6.00	9.00
6P	7.50	10.50
7P	9.00	12.00
8P	10.50	13.50
9P	12.00	15.00
10P	13.50	16.50
11P	15.00	18.00
12P	16.50	19.50
13P	18.00	21.00
14P	19.50	22.50
15P	21.00	24.00

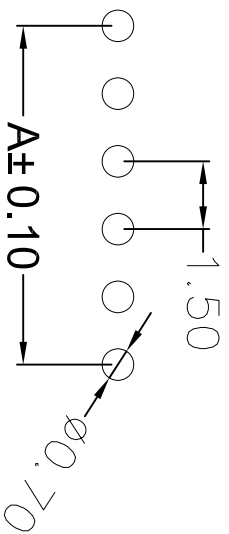

PCB Layout

LASTAR

Lastar Technology CO., LTD

DRAW NO.:	150-01D-XX	DATE:	070505	DRAW NAME:	Water Pitch 1.5mm DIP180		
DESIGN:	HANG	CHECK:	WANGCM	P/N NO.:	WF-150-01D-XX54	FILE:	
CHECK:	HUYX	APPROVED:	070506	UNIT:	mm	SHEET:	N/A
				MODEL:		REV. AO	SCALE N/A